







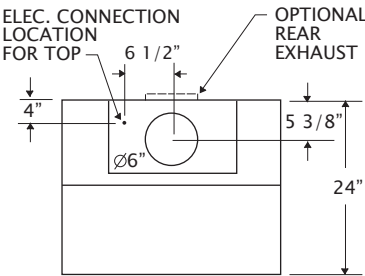
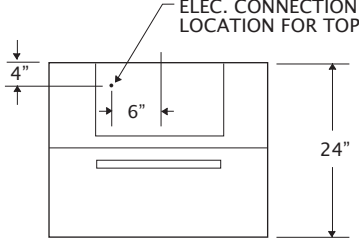





RANGE HOOD FEATURES AND SPECIFICATIONS

15" Hood MODELS: (BCH3015) (BCH3615)	10" Hood MODELS: (BCH3010) (BCH3610)	10" Hood—RECIRCULATING MODELS: (BCH3010R) (BCH3610R)			
 SIDE VIEW	 SIDE VIEW	 SIDE VIEW			
 FRONT VIEW	 FRONT VIEW	 FRONT VIEW			
 TOP VIEW	 TOP VIEW	 TOP VIEW			
 BACK VIEW	 BACK VIEW	 BACK VIEW			
Dimensions	15"H x 30"W(OR 36") x 24"D	Dimensions	10"H x 30"W(OR 36") x 24"D	Dimensions	10"H x 30"W(OR 36") x 24"D
Vent	External, Reversible top or rear exhaust.	Vent	External, Reversible top or rear exhaust.	Vent	Recirculating
Blower	600 CFM/ 3-Speed	Blower	600 CFM/ Variable Speed	Blower	520 CFM/ Variable Speed
Electrical	120 VAC, 15 Amps	Electrical	120 VAC, 15 Amps	Electrical	120 V, 15 Amps

FEATURES:

Commercial grade 18 gauge 300 stainless steel construction, Welded seamless corners, Dishwasher safe stainless steel baffle filters, Variable or 3-speed blower control, Halogen lamps with dimmer control, Largest filtered capture in the industry

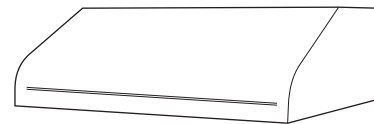

INSTALL NOTES:

Allow 30"-36" between stove top and bottom of range hood (or per your local city codes).



TOLL FREE: 1-877-842-3269

EMAIL: info@bigchill.com

WEB: www.bigchill.com