






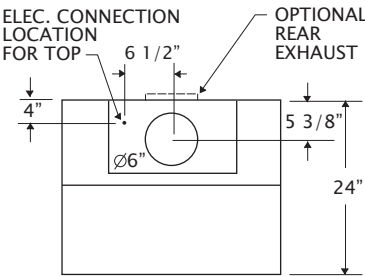
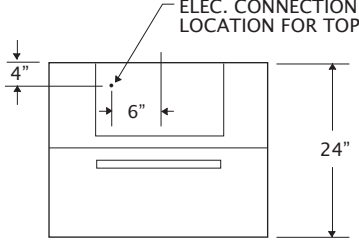





RANGE HOOD FEATURES AND SPECIFICATIONS


| 15" Hood MODELS: (BCH3015) (BCH3615) | 10" Hood MODELS: (BCH3010) (BCH3610) | 10" Hood—RECIRCULATING MODELS: (BCH3010R) (BCH3610R) | | | |
|--|--|--|--|------------|----------------------------|
|  SIDE VIEW |  SIDE VIEW |  SIDE VIEW | | | |
|  FRONT VIEW |  FRONT VIEW |  FRONT VIEW | | | |
|  TOP VIEW |  TOP VIEW |  TOP VIEW | | | |
|  BACK VIEW |  BACK VIEW |  BACK VIEW | | | |
| Dimensions | 15"H x 30"W(OR 36") x 24"D | Dimensions | 10"H x 30"W(OR 36") x 24"D | Dimensions | 10"H x 30"W(OR 36") x 24"D |
| Vent | External, Reversible top or rear exhaust. | Vent | External, Reversible top or rear exhaust. | Vent | Recirculating |
| Blower | 600 CFM/ 3-Speed | Blower | 600 CFM/ Variable Speed | Blower | 520 CFM/ Variable Speed |
| Electrical | 120 VAC, 15 Amps | Electrical | 120 VAC, 15 Amps | Electrical | 120 V, 15 Amps |

FEATURES:

Commercial grade 18 gauge 300 stainless steel construction, Welded seamless corners, Dishwasher safe stainless steel baffle filters, Variable or 3-speed blower control, Halogen lamps with dimmer control, Largest filtered capture in the industry

INSTALL NOTES:


Allow 30"-36" between stove top and bottom of range hood (or per your local city codes).

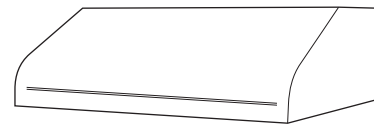


RANGE HOOD FEATURES AND SPECIFICATIONS

12" Tall Bungalow Hood

MODELS:
(BCH3012)
(BCH3612)

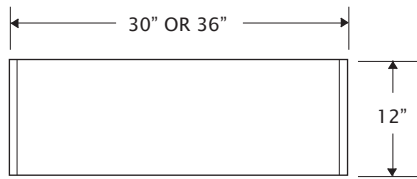


FRONT VIEW





SIDE VIEW

OPTIONAL
REAR EXHAUST

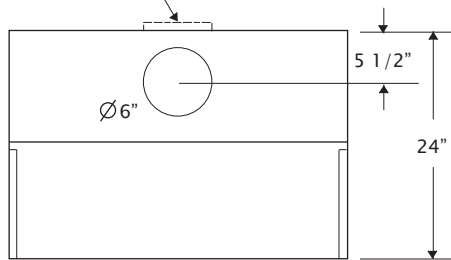

TOP VIEW

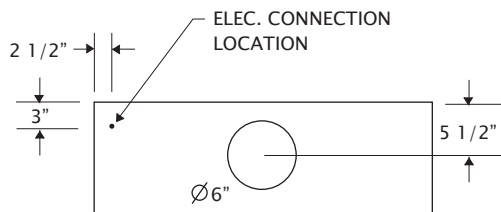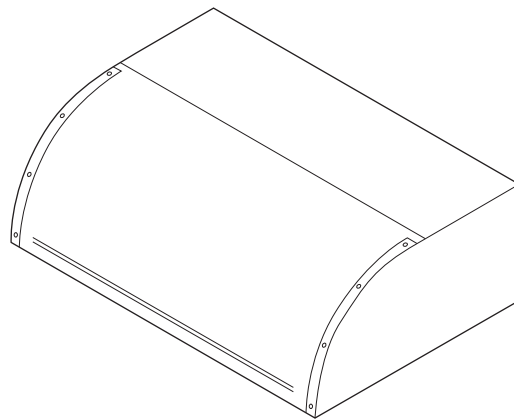

BACK VIEW

| | |
|------------|---|
| Dimensions | 12"H x 30"W (OR 36") x 24"D |
| Vent | External, Reversible top or rear exhaust. |
| Blower | 600 CFM / 3-Speed |
| Electrical | 120 VAC, 15 Amps |

FEATURES:

Commercial grade 18 gauge 300 stainless steel construction, Welded seamless corners, Dishwasher safe stainless steel baffle filters, 3-Speed blower control, Halogen lamps with dimmer control, Largest filtered capture in the industry

INSTALL NOTES:

Allow 30"-36" between stove top and bottom of range hood (or per your local city codes).



TOLL FREE: 1-877-842-3269

EMAIL: info@bigchill.com

WEB: www.bigchill.com